

TX72XXM Series

0.5A Low Power LDO

Features

- Low voltage drop: 0.17V@100mA
- High input voltage: 15V
- Low temperature coefficient
- Large Output Current: >0.5A
- Low Quiescent Current: 1.0uA
- Output voltage accuracy: tolerance $\pm 2\%$
- Built-in current limiter
- SOT89,SOT89-5,SOT23-3 and SOT23-5 packages

Applications

- Battery-powered equipment
- Hand-Hold Equipment
- GRS Receivers
- Wireless LAN

General Description

The TX72XXM series is a group of positive voltage output, three-pin regulators, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The TX72XXM consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient response to load variations have improved in comparison to the existing series. SOT89, SOT89-5,SOT23-3 and SOT23-5 packages are available.

Selection Table

Part No.	Output Voltage	Package	Marking
TX7218xx	1.8V	SOT89 SOT89-5 SOT23 SOT23-5 SOT23-5B	Refer to Marking rule
TX7228xx	2.8V		
TX7230xx	3.0V		
TX7233xx	3.3V		
TX7236xx	3.6V		
TX7240xx	4.0V		
TX7245xx	4.5V		
TX7250xx	5.0V		

Order Information

TX72①②③④


Designator	Symbol	Description
① ②	Integer	Output Voltage(1.8~5.0V)
③	P	Package:SOT89
	P5	Package:SOT89-5
	M	Package:SOT23-3
	M5	Package:SOT23-5
	M5B	Package:SOT23-5B
④	R	RoHS / Pb Free
	G	Halogen Free

TX72XXM Series

0.5A Low Power LDO


Note: "①②" stands for output voltages. Other voltages can be specially customized

Block Diagram

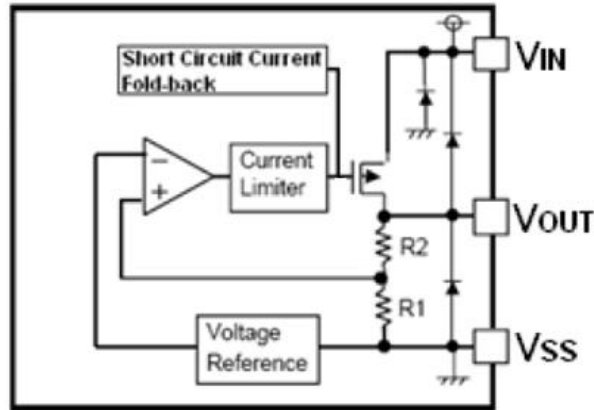


Pin Assignment


SOT89 (Top view)




SOT89-5 (Top view)




SOT23-3 (Top view)



SOT23-5 (Top view)

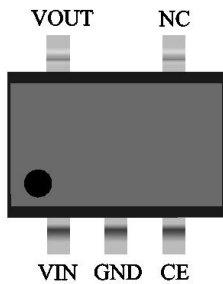

SOT23-5B (Top view)

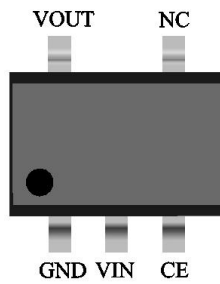

Absolute Maximum Ratings

Supply Voltage	3.5V to 18V	Storage Temperature	-40°C to 125°C
Operating Temperature	-40°C to 85°C		


Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

TX72XXM Series


0.5A Low Power LDO

Marking Rule

(1) SOT23-3 and SOT23-5

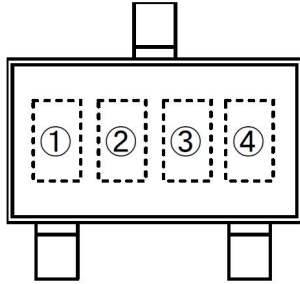

SOT-23
(TOP VIEW)

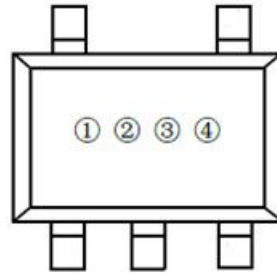

SOT23-5
(TOP VIEW)

List of Product Name vs. Product Code


Product Name	Product Code		
	(1)	(2)	(3)
TX7212	S	A	A
TX7213	S	A	B
TX7214	S	A	C
TX7215	S	A	D
TX7216	S	A	E
TX7217	S	A	F
TX7218	S	A	G
TX7219	S	A	I
TX7220	S	A	J
TX7221	S	A	K
TX7222	S	A	L
TX7223	S	A	M
TX7224	S	A	N
TX7225	S	A	O
TX7226	S	A	P
TX7227	S	A	Q
TX7228	S	A	R
TX7229	S	A	T
TX7230	S	A	U
TX7231	S	A	V

Product Name	Product Code		
	(1)	(2)	(3)
TX7232	S	A	W
TX7233	S	A	X
TX7234	S	A	Y
TX7235	S	A	Z
TX7236	S	B	A
TX7237	S	B	B
TX7238	S	B	C
TX7239	S	B	D
TX7240	S	B	E
TX7241	S	B	F
TX7242	S	B	J
TX7243	S	B	H
TX7244	S	B	I
TX7245	S	B	J
TX7246	S	B	K
TX7247	S	B	L
TX7248	S	B	M
TX7249	S	B	N
TX7250	S	B	O


NOTE: SOT23-5, the last is Z
SOT23-5B, the last is Y

TX72XXM Series 0.5A Low Power LDO

(2) SOT89 and SOT89-5

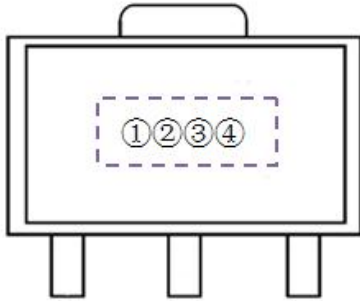

SOT-89
(TOP VIEW)

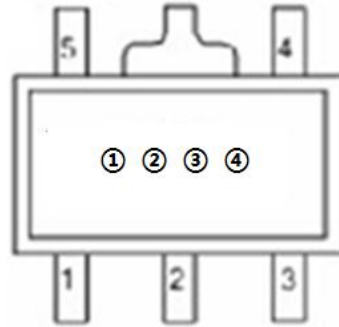

SOT89-5
(TOP VIEW)

Product Code: E					
Output Voltage Code					
Vout	Code	Vout	Code	Vout	Code
1.5V	1	2.7V	C	3.9V	O
1.6V	2	2.8V	D	4.0V	P
1.7V	3	2.9V	E	4.1V	Q
1.8V	4	3.0V	F	4.2V	R
1.9V	5	3.1V	G	4.3V	S
2.0V	6	3.2V	H	4.4V	T
2.1V	7	3.3V	I	4.5V	U
2.2V	8	3.4V	J	4.6V	V
2.3V	9	3.5V	K	4.7V	W
2.4V	0	3.6V	L	4.8V	X
2.5V	A	3.7V	M	4.9V	Y
2.6V	B	3.8V	N	5.0V	Z
Data Code: XX					

Note: The last two of them are based on the time of this product which is the first time into production, and the third is the launch of this product ,it can be in 1 ~ 9 , which is expressed in "0" in October, in November with an "A", in December with "B"; the fourth is of the launch of the product, such as expressed in "0" in 2010, in "3" in 2013. For example: EZ81 represents TX7250PR product is first put into production in August in 2011.

TX72XXM Series 0.5A Low Power LDO

Electrical Characteristics

TX72XXM for any output voltage

(Ta=25°C)


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	Vout	Vin=Vout+1V 1.0mA≤Iout≤30mA	Vout×0.98	--	Vout×1.02	V
Output Current*1	Iout	Vin-Vout=1V	500	--	--	mA
Low dropout*2	Vdrop	Refer to the next table				
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	1.6V≤Vin≤8V Iout=100mA	--	0.05	0.2	%/V
Load Regulation	ΔVout	Vin= Vout+1V 1.0mA≤Iout≤100mA	--	12	30	mV
Output voltage Temperature Coefficiency	$\frac{\Delta V_{OUT}}{\Delta Ta}$	Iout=30mA 0°C≤Ta≤70°C	--	±100	--	Ppm/°C
PSRR	PSRR	F=1KHz Vin=Vout+1V	--	40	--	dB
Supply Current	Iss1	--	--	1	2	uA
Input Voltage	Vin	--	3.5	--	15	V

Electrical Characteristics by Output Voltage:

Output Voltage Vout(V)	Dropout Voltage Vdif (V)		
	Conditions	Typ.	Max.
Vout ≤ 2.0V	Iout=60 mA	0.1	0.12
2.0 < Vout ≤ 3.0	Iout=80 mA	0.12	0.14
3.0 < Vout ≤ 4.0	Iout=100 mA	0.16	0.18
4.0 < Vout ≤ 5.0		0.17	0.18
3.0 < Vout ≤ 4.0	Iout=200 mA	0.21	0.24
4.0 < Vout ≤ 6.0		0.20	0.22
3.0 < Vout ≤ 4.0	Iout=500 mA	0.8	0.85
4.0 < Vout ≤ 6.0		0.75	0.80

TX72XXM Series 0.5A Low Power LDO

Typical Application

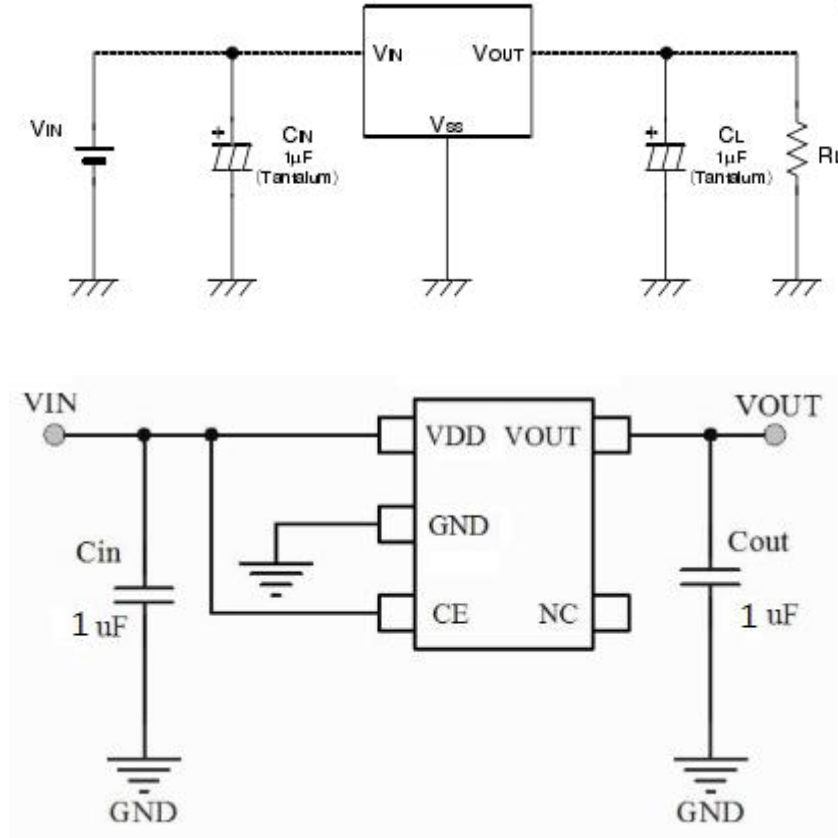




Note1: Input capacitor $C_{IN}=1\mu F$.

Note2: Output capacitor $C_{OUT}=1\mu F/6.8\mu F$ (1μF Tantalum capacitor or 6.8μF ceramic capacitor is recommended).

TX72XXM Series 0.5A Low Power LDO


Typical Performance Characteristics

(1) Output Voltage vs Input voltage

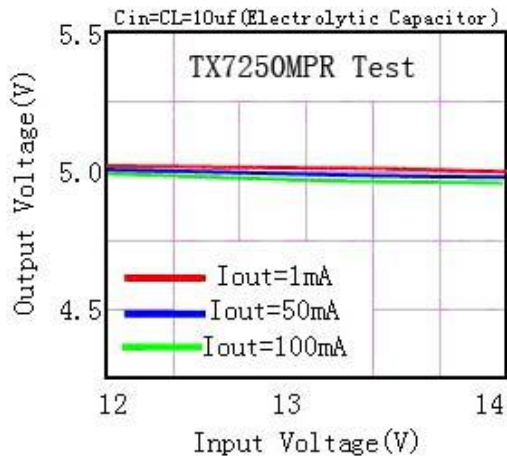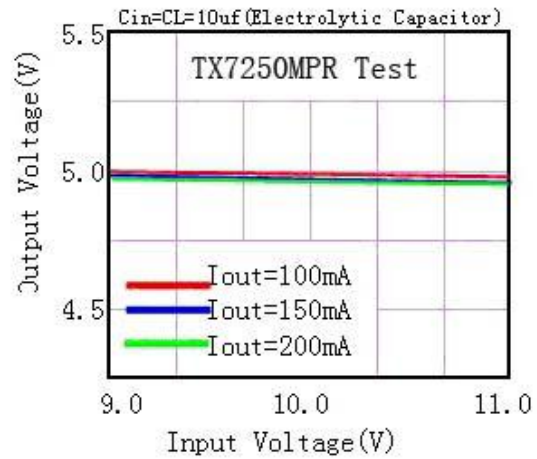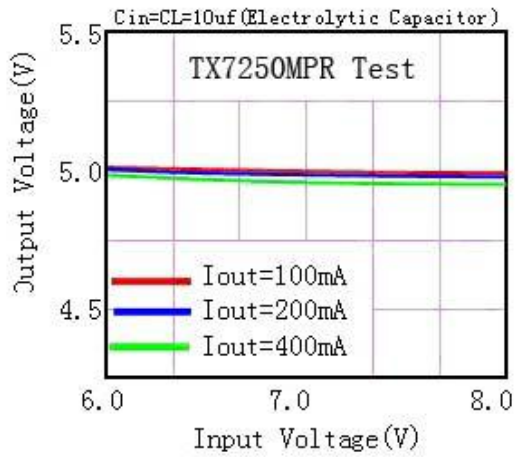


TX72XXM Series 0.5A Low Power LDO

(2) Output Voltage vs. Output Current

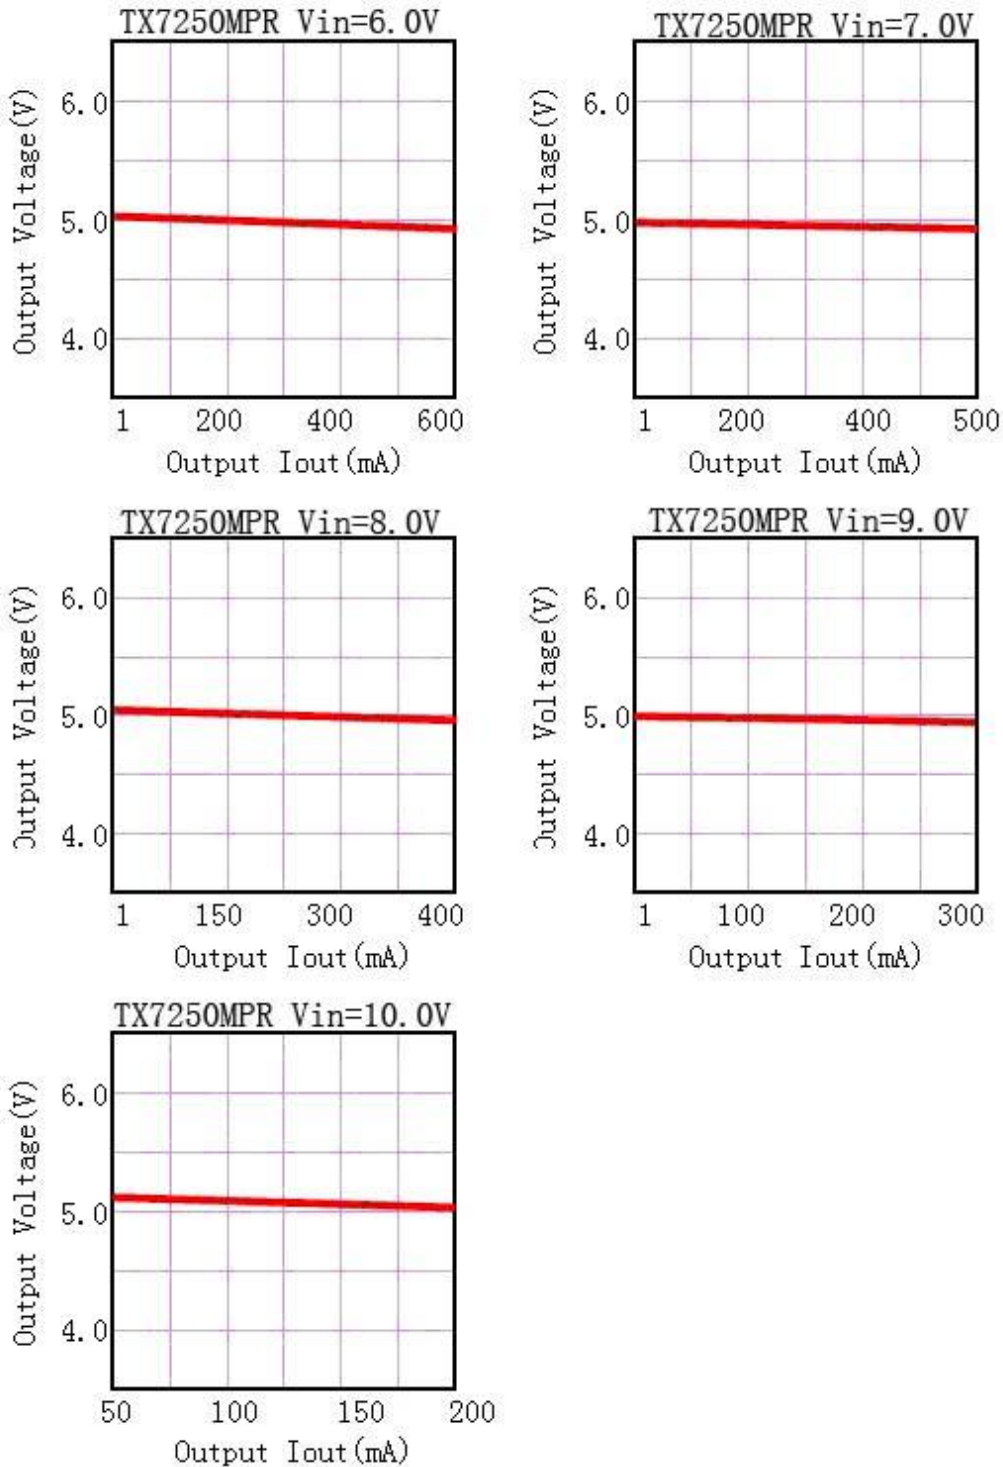


TX72XXM Series 0.5A Low Power LDO

(3) Output Voltage vs.Ambient Temperature

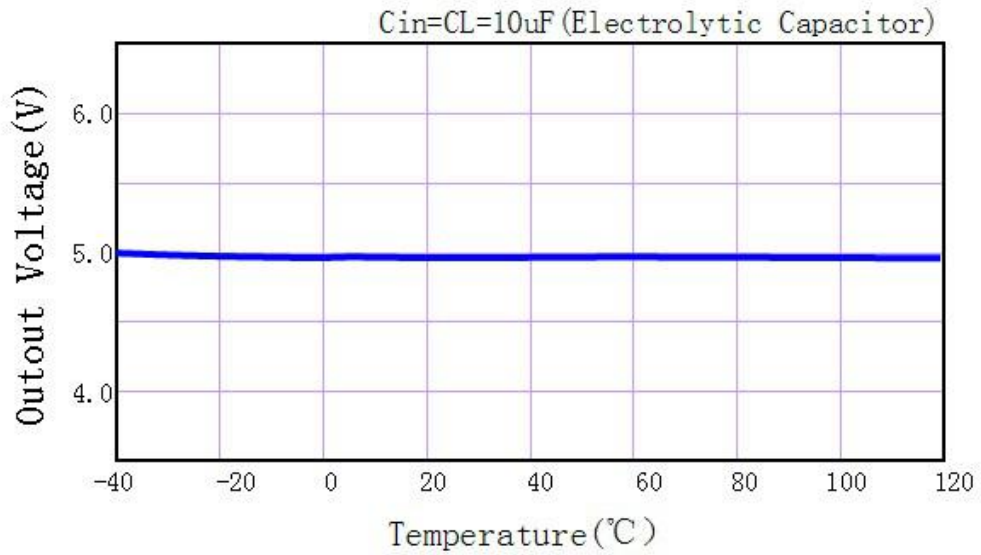

TX72XXM Series 0.5A Low Power LDO


Package Information 3-pin SOT89 Outline Dimensions

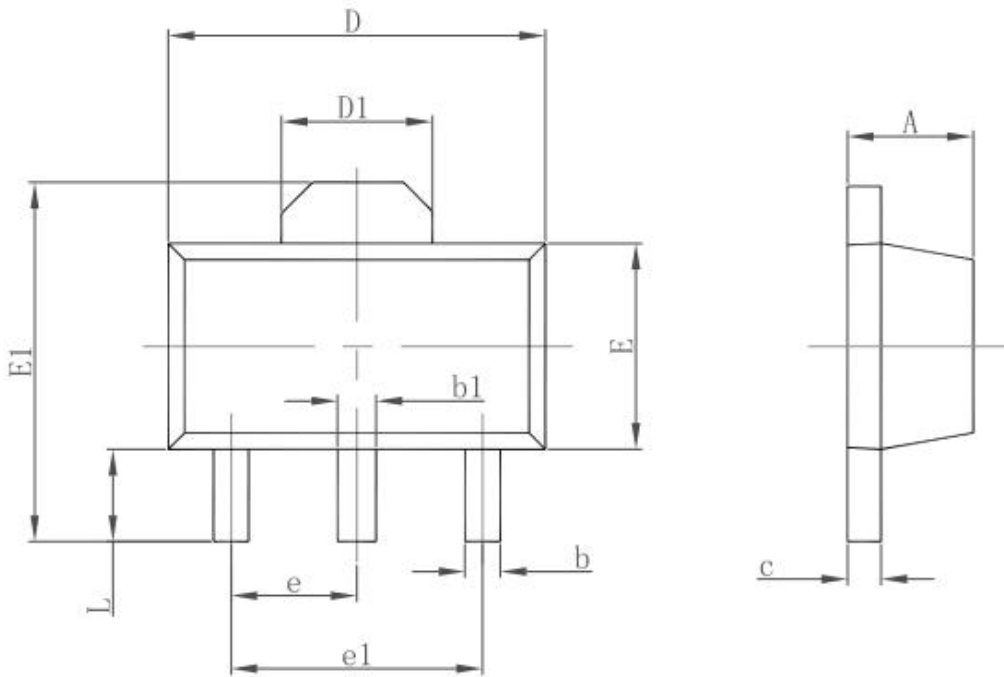

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

TX72XXM Series 0.5A Low Power LDO


SOT89-5 Outline Dimensions

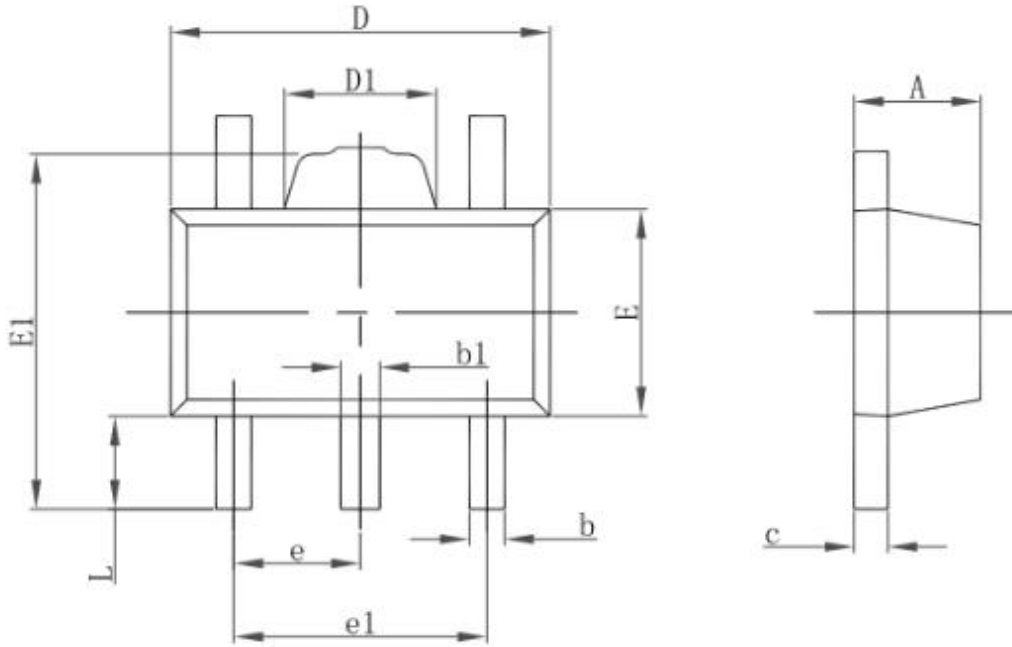

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.360	0.560	0.014	0.022
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.400	1.800	0.055	0.071
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500TYP.		0.060TYP.	
e1	2.900	3.100	0.114	0.122
L	0.900	1.100	0.035	0.043

TX72XXM Series 0.5A Low Power LDO


3-pin SOT23-3 Outline Dimensions

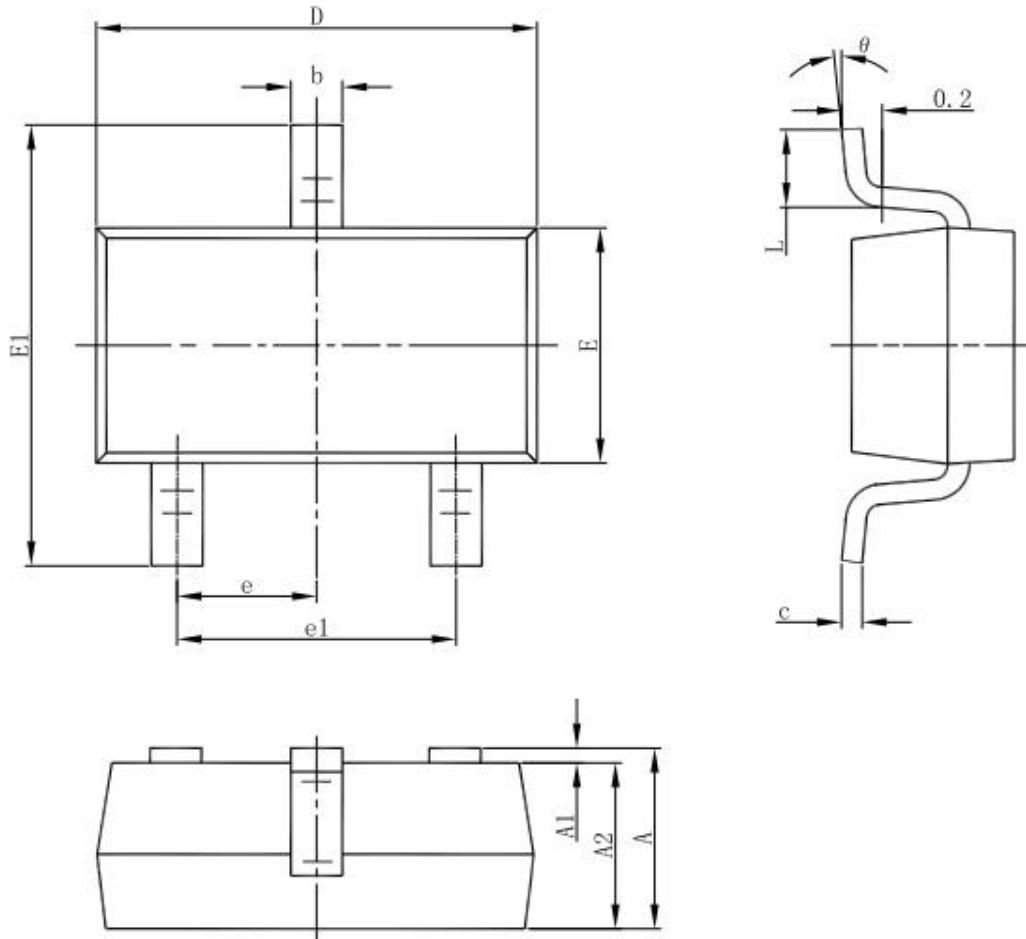

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

TX72XXM Series 0.5A Low Power LDO

SOT23-5 Outline Dimensions

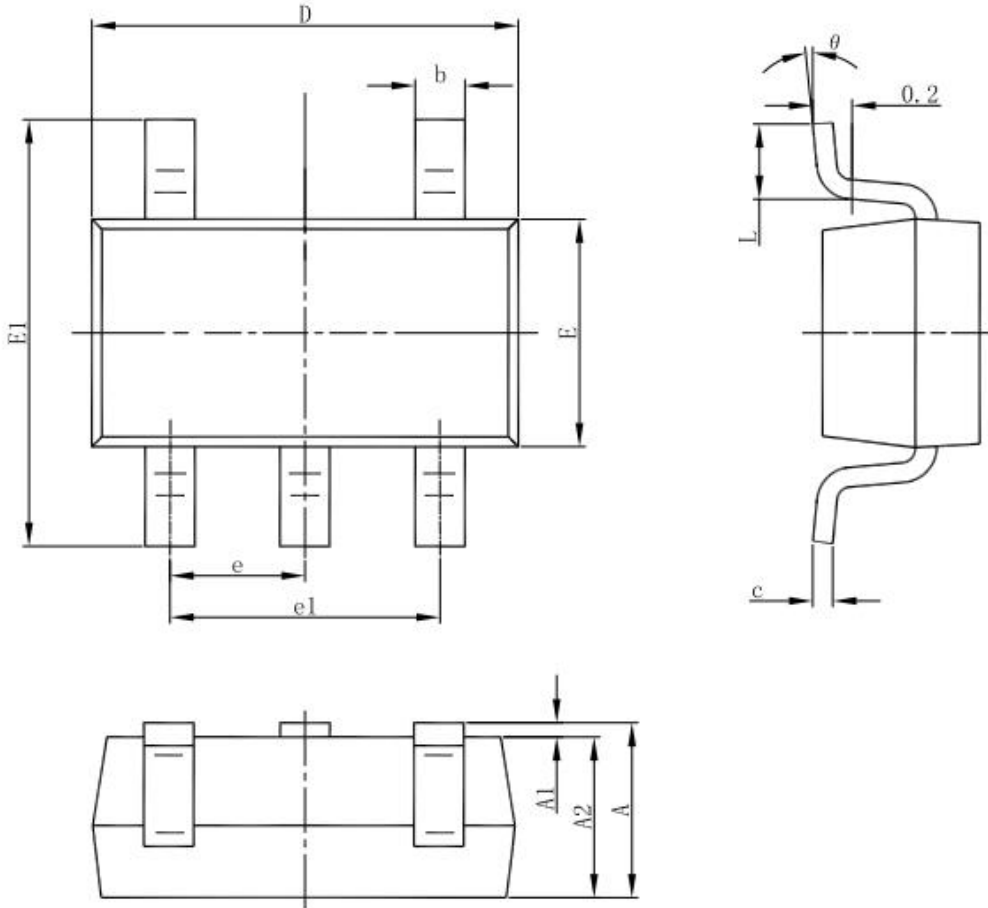

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

TX72XXM Series

0.5A Low Power LDO

© Shanghai TX Electronics Sci-Tech Co., Ltd

TX cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a TX product. No circuit patent license, copyrights or other intellectual property rights are implied. TX reserves the right to make changes to their products or specifications without notice. Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.